DMX RECEIVER

BlueLite Mini RX

Ultra compact single Universe DMX receiver



TECHNICAL SPECIFICATION

Voltage input range	8–36 VDC
Power consumption	2 W
Single universe DMX receiver	512 channels
Dynamic adaptive frequency hopping	✔
Latency	Less than 5 ms
DMX frame rate	1–830 Hz
Frame synchronization	Less than 0,01 ms
Compatible with W-DMX™ G2/G3/G4 transmitters 2,4 Ghz	✔
Frequency range	2,4 GHz
Transmission distance	500 m
Protection class	IP20
Operating temperature range (ambient)	–20 °C to +70 °C
Humidity	0–90 % non-condensing
Housing	Plastic RAL9005
Weight/Dimension	50 g/97 × 40 × 21 mm (L × W × H)
Connectors	bare ends
Conformity	EN 50081, 50082, 55014, 55022, 60950, 61000-3-2, 61000-3-3
Approvals	FCC 15.247&68 Class B; Canada ICES 003 CE; EN 301 489-1; EN 301 489-3
	EN 300 328; SS-EN 61547:2009; EN 60950; SRRC - China;
	ARIB STD-T66 - Japan


a green product from AUSTRIA


LDDE LIGHTING IDEAS







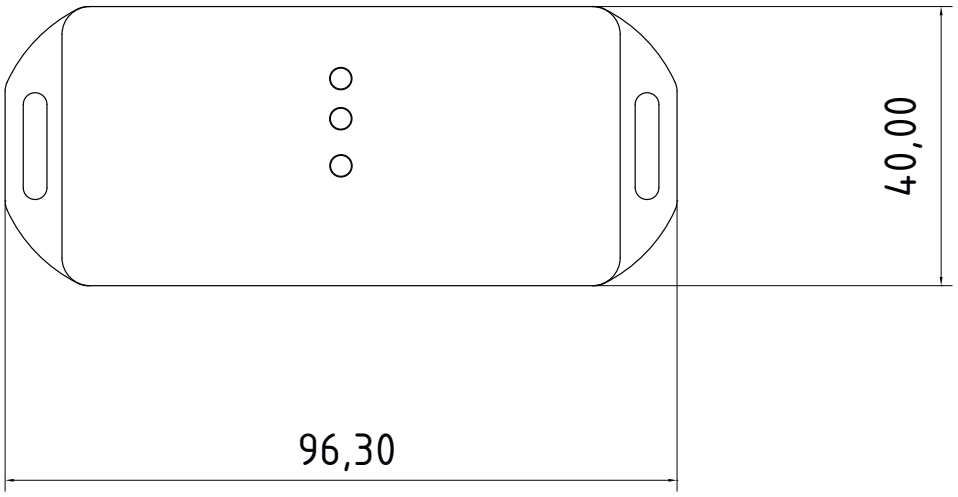

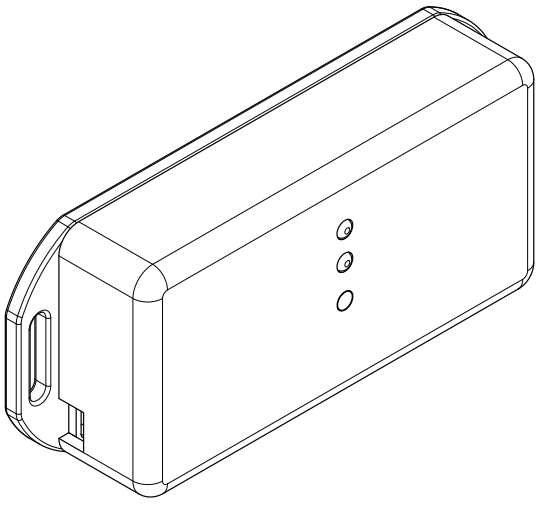

LDDE
LIGHTING IDEAS

Lighting
Design
Developement
Electronics

LDDE Vertriebsgesellschaft m. b. H.
Dreherstrasse 64, 1110 Vienna, Austria
P: +43 1 7671811 0, F: +43 1 7671811 99
E: office@ldde.com, W: www.ldde.com

E&OE LDDE Vertriebs GmbH behält sich das Recht vor, ohne vorherige Ankündigung, Änderungen an den genannten Produkten vorzunehmen. Copyright LDDE Vertriebs GmbH 2016

29985011232