DMX CONSTANT CURRENT DIMMER

SPECTRADIM 2/CC /750 /2000 isolated

The compact LED current dimmer SpectraDim 2/CC, manufactured in Austria, offers two output channels that can be controlled independently of one another via DMX512. With a supply voltage of 12V to 48V DC, each output can drive a current of max.750mA or, in the more powerful version, 2A. The high-resolution control and flicker-free dimming make the module perfect for HDTV, film and theater. The robust metal housing impresses with its perfect mounting options and its robustness. The configuration can be done via the built-in BCD switch as well as via the optionally available cable remote control.



specification


Voltage input Rangeg	12-48V DC
Input current	4A max.
Mounting	Wallmount
Input	1 isolated DMX Input / DMX Thrue
Output	2 Outputs | @/750 max. 750mA | @/2000 max. 2000mA per Channel
USITT DMX 512/1990	✓ IN 8/16 Bit / Out 16Bit
LED @Status	RGB
PWM Frequency	8kHz „flicker free“ for HDTV
ROHS kompatibel	✓
Article#	VAR 750mA 20050310931 | VAR 2000mA 20050310931
Weight / Dimension	both versions 270g B x L x H 100 x 88 x 26 mm
Terminal	DMX +,-,SCR, 0,14-0,5 mm^2 AWG 26-20 (Push Terminals) DC +,- 0,2-2,0 mm^2 AWG 24-14 (Push Terminals)
Operating Temperatur	0°C to 50°C
CE Conformity	EN 55015, EN 61547, EN 61000-6-2 EN 61000-6-4, EN 61000-3-2, EN 61000-3-3
Protection class	IP20

Green
LED products from
AUSTRIA

LDDE
LIGHTING IDEAS





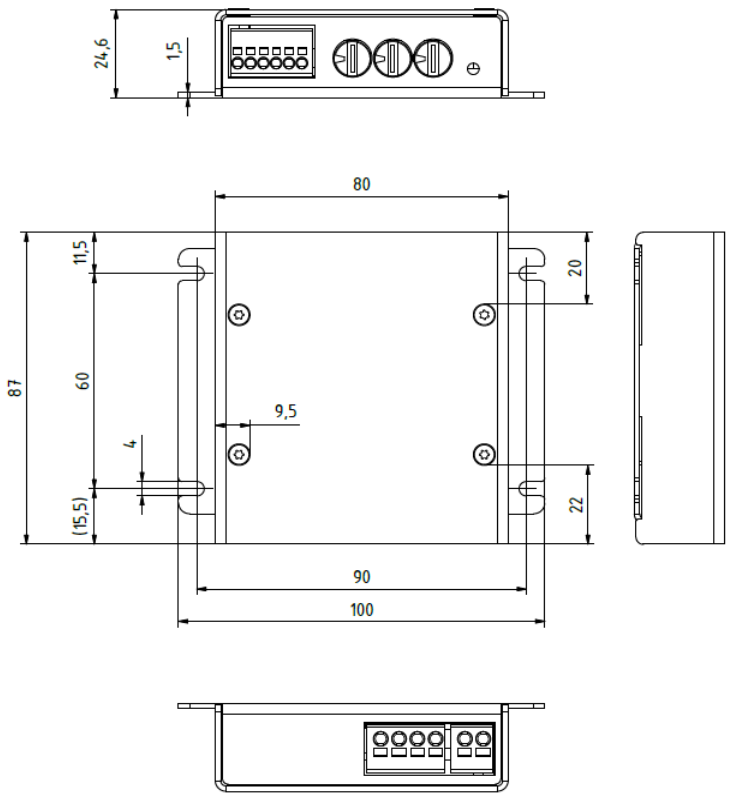

LDDE
LIGHTING IDEAS

Lighting
Design
Development
Electronics

LDDE Vertriebsgesellschaft.m.b.H
Simmeringer Hauptstraße 357
1110 Vienna, Austria
P: +43 1 7671811 0 F: +43 1 767 18 11 99
E: office@ldde.com, W: www.ldde.com